


LokWorx is a pressure sensitive adhesive for the installation of EcoWorx carpet tile. This non-toxic and odorless system provides an alternative to wet adhesive, virtually eliminating the issue of VOCs (Volatile Organic Compounds), and provides ease and versatility of installation.

LokWorx can be applied to the corner of a tile for floating or center applied and adhered to the floor for attached installations. The box serves as the dispenser making LokWorx easy to store, maintain and use. Floor preparation is limited to smoothing floor and clearing dust and debris.

## APPLICATION (500 tabs per applicator box)

	Application	Tabs required per tile box	Spread Rate
<b>ADHERED APPLICATION</b>	Apply 1 square per 24x24 in the center of the tile	12	222 sq. yd
	Apply 2 squares per 18x36 in the center of the tile	20	250 sq. yd
	Apply 2 squares per 9x36 in the center of the tile	40	125 sq. yd
	<i>Installations will require extra LokWorx for perimeter tiles. Installations must be rolled with 75 lb roller.</i>		
<b>FLOATING APPLICATION</b>	Apply 1/4 square to corner of 24x24 in tile	12	222 sq. yd
	Apply 1/4 squares to 4 corners and 1/2 square per long side of 18x36 tile	20	250 sq. yd
	Apply 1/4 squares to 4 corners and 1/2 square per long side of 9x36 tile	40	125 sq. yd
	<i>Perimeter of floating installation must be secured. An additional 25% LokWorx tabs should be ordered to account for perimeter cut tiles, site layout and tiles shapes / sizes. Installations must be rolled with 75 lb. roller.</i>		

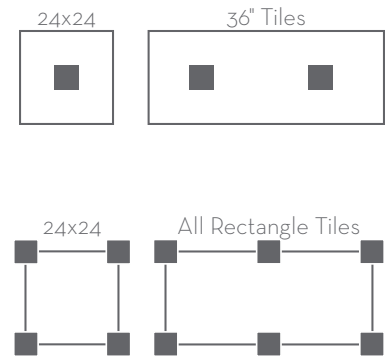

## ENVIRONMENTAL

Virtually VOC free  
Green Label Plus Certified GLP01642

## WARRANTY

One year commercial limited warranty

## INSTALLATION

For detailed installation instructions, refer to Lokworx installation guidelines or call 800.241.4692

**STORAGE:** Unlimited shelf life. Store under 120 degrees

**MOISTURE TESTING:** Up to 5 pounds, 85% RH and 12pH

**APPROVED SUBFLOORS:** VCT, VAT, terrazzo, raised access floors, finished hardwood and concrete

**FLOOR PREPARATION:** Level and clean - refer to full installation guidelines for more information

**APPLICATION:** Apply tabs according to application chart and roll with a 75 lb. roller

**SAFETY DATA SHEET:** Not required. This item is an article